

# BOLLINGER B4

CURB WEIGHT  
**6,645 - 7,920 lbs.**

MAX PAYLOAD  
**7,080-8,355 lbs.**

WHEELS  
**19.5 inches**




RANGE  
**85-185 miles**

WHEELBASE  
**158 inches**

L\*W\*H  
**273\*89\*107**

\* Preproduction model shown

Based on current specifications and subject to change.

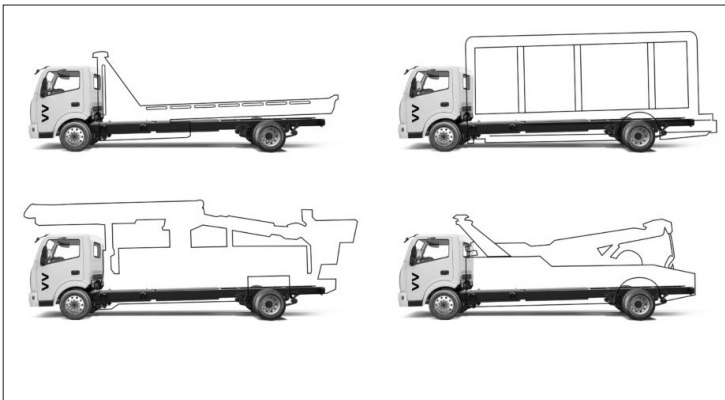

**Mullen Headquarters**  
1405 Pioneer Street,  
Brea, CA 92821 USA  
+1 714-613-1900



# BOLLINGER B4

DIMENSIONS & CAPACITY	
Wheelbase	158 in.
L*W*H	273*89*107
GVWR	15,000 lbs.
Curb Weight	1 pack - 6,645lbs. 2 packs - 7,920 lbs.
Max Payload	1 pack - 8,355 lbs. 2 packs - 7,080 lbs.
Bumper to Back of Cab (BBC)	68.2 in.
Cab to Axle (CA)	136 in.
Cab to End of Frame (CE)	205.5 in.
Maximum Box Length	18 ft.
Maximum Box Width	102 in.
Turning Diameter	42 ft.
Frame RBM	567,200 (lb.-ft./in.)
MECHANICAL	
eAxle	250 kW
Battery Capacity	1 pack - 79 kWh 2 packs - 158 kWh
Range	1 pack - 85 Miles 2 packs - 185 Miles
Regenerative Braking	Standard
Lev 2 / Lev 3 Charging	Standard
Drive Type	Rear Wheel Drive (RWD)
DATA CONNECTIVITY	
Telematics	Optional

PERFORMANCE	
Horsepower	368 hp
Torque	700 lb.-ft.
Top Speed	70 mph
STANDARD INTERIOR FEATURES	
Driver Seat - Adjustable Split Bench With Console	
7" Touch Screen High-Feature Infotainment Center	
Charging USB Sockets	
12 Volt Accessory Power Output	
Power Locks	
Power Windows	
Air Conditioning	
STANDARD SAFETY AND SECURITY FEATURES	
Anti-Lock Brake System (ABS)	
Electronic Brake-force Distribution	
Rear View Camera & Monitor	
360 sensor warnings	
Pedestrian Alert	
Automated Emergency Braking	
Blind Spot Warning	
Lane Departure Warning	
Lane Centering	
Adaptive Cruise Control	

Note: All figures are reference only and Mullen/Bollinger reserve the right to modify any and all information shown, without notification. Options subject to change.

(1) Range can vary depending on conditions such as climate, driving behavior, road conditions, etc.