

STARTING THE VEHICLE



1. Fasten seatbelt.
2. Verify parking brake is engaged and vehicle is in Neutral.
3. Push in brake pedal.
4. Insert key into ignition.
5. Turn key to START position.
6. The READY indicator illuminates when the vehicle is running. All other indicator lights should be off except for the parking brake indicator light.
7. With your foot on the brake pedal, release the parking brake – press the button on the end of lever and push lever downward to the home position.

SHIFTING THE VEHICLE



1. Ensure vehicle is in READY mode.
2. Maintain pressure on the brake pedal.
3. Release parking brake.
4. Move the gear selector to desired gear.
5. Verify the selected gear on the instrument panel before proceeding.

R	Reverse	D	Drive
N	Neutral	E	Economy ¹


⚠️ WARNING

When changing gears, ALWAYS verify that the selected gear is displayed on the instrument panel. Improper shifting could cause the vehicle to move in an unexpected direction.

NOTE

1. During normal driving, the driver may turn the gear selector to Economy (E) mode and continue driving. In Economy mode, an increased efficiency can be obtained from the high voltage battery.

DRIVER CONTROLS OVERVIEW

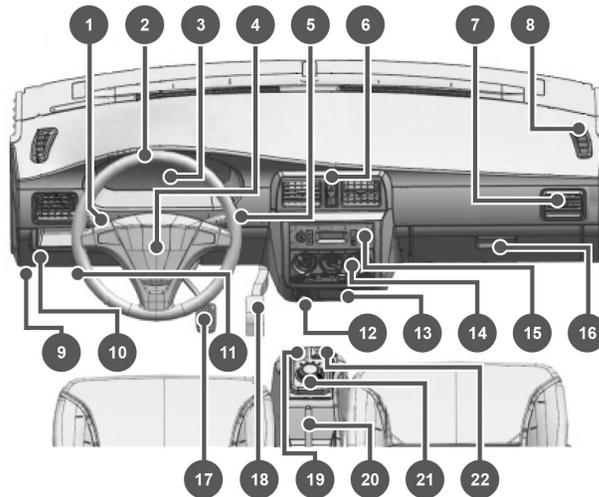

- | | |
|--|---|
| 1 Headlamp Switch | 10 Hood Release |
| 2 Steering Wheel | 11 Dash Light Dimmer Dial |
| 3 Electronic Gauge Panel | 12 12-Volt Accessory Outlet |
| 4 Horn Pad | 13 Coin Tray |
| 5 Windshield Wiper and Washer Switch | 14 Heating/Ventilation/Air Conditioning (HVAC) Control Panel (PTC = Heat) |
| 6 Emergency Flasher Switch | 15 Audio System Controls |
| 7 Heating/Ventilation/Air Conditioning (HVAC) Side Vents | 16 Glove Compartment |
| 8 Side Window Defroster | 17 Brake Pedal |
| 9 Charging Port Door Release | 18 Accelerator Pedal |
| | 19 Cargo Area Light Switch |
| | 20 Parking Brake |
| | 21 Gear Selector Dial |
| | 22 USB Port - Charging Only |

THIS VEHICLE IS NOT EQUIPPED WITH “PARK” ON THE GEAR SELECTOR

You must ALWAYS put your vehicle in Neutral and engage the parking brake every time you park. The parking brake lever is located to the right of the driver's seat.

To set the parking brake:

1. Completely stop the vehicle.
2. With the vehicle in Neutral, press brake pedal while pulling the parking brake lever all the way up.
3. Verify parking brake is engaged.

⚠️ WARNING

Failure to apply the parking brake may allow the vehicle to roll, potentially causing property damage and personal injury.



Mullen ONE

Class 1 Urban Delivery Cargo Van

Quick-Start Guide



Pre-production model shown



Scan code to visit Mullen Vehicle Center website to access the most up to date information on your vehicle.

AGIB-004X-AA

KEYS AND LOCKS



Each vehicle is equipped with two remote entry key fobs. The key fobs unlock/lock the doors and liftgate remotely.

If locking the vehicle with a front or side door ajar, the vehicle's exterior lights will flash, and the horn will sound three times before locking. The liftgate can be left open when locking the vehicle using the key fob. The liftgate will lock once fully closed.

If you use the key fob to unlock the doors and do not open them within 90 seconds, the vehicle will automatically relock itself.

CHARGING PREPARATION

⚠ WARNING

This vehicle uses an electric drivetrain powered by a high-voltage battery. In the event of a fire, accident, or other emergency situation, ALWAYS ASSUME THE HIGH VOLTAGE SYSTEM IS LIVE!



1. Before charging the vehicle, engage the parking brake, turn the key to the LOCK position, and remove the key.
2. Locate the charging cable².
3. The charging port of this vehicle is located near the passenger door, as shown.

NOTE

2. Inspect the charging cable for signs of breaches in insulation. Ensure the connection ports are free of corrosion, water, or debris.

CHARGING OPERATION




1. Pull the release handle for the charging port door.
2. Press release on the right side of the black cover to open it, and swing the cover to the left.
3. Insert the charging plug into the vehicle charging port.
4. If using a wall mounted charger, make sure the charger is on and ready to charge. The instrument panel Home Screen should display "Charging."

LIFTING THE HOOD



1. Locate the hood release on the lower left of the instrument panel.
2. Lift the secondary release latch found in the center gap beneath the hood.
3. Raise the hood and prop the support rod on the right side in the designated clip.

CHECK FLUIDS

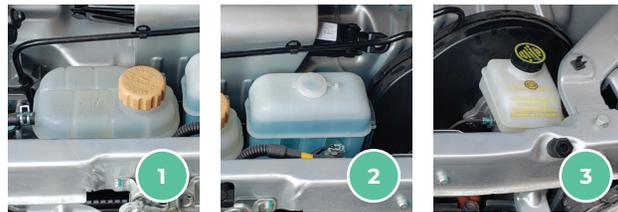

1. Coolant/Antifreeze
2. Windshield Washer Solvent
3. Brake Fluid

12-VOLT BATTERY CHARGING

If the vehicle is parked for an extended period, (e.g., more than 20 days), the low voltage, 12-volt battery may lose charge and fail to start the vehicle³. To prevent the 12-volt battery from becoming depleted, periodically start the vehicle to allow the battery to charge.

1. Apply the parking brake.
2. Turn the key to the START position.
3. The READY indicator will display on the instrument panel.
4. Let the vehicle sit in READY state for 2 hours.
5. Then, turn the key to the OFF position. The 12-volt battery should be fully charged⁴.

NOTE

3. If vehicle fails to start, see Mullen ONE Owner's Manual for Jump-Starting the Vehicle.
4. Keep the doors fully closed and locked when parking the vehicle to minimize loss of charge of the 12-volt battery.

Pre-production model shown



For Parts, Service and Warranty, please contact Mullen Automotive Customer Solutions Support Team at (248) 988-4498 or visit www.mullenusa.com.

Thank you!
Your team at Mullen Automotive, Inc.



© Copyright 2023 Mullen Automotive, Inc. All Rights Reserved. All figures are reference only and Mullen Automotive, Inc. reserves the right to modify any and all information shown, without notification. Options subject to change. Battery range can vary depending on conditions such as climate, driving behavior, road conditions, etc.